


Microphone and modulation cable Logicable MP; FRNC; grey | 2 x number of pairs Art. No.: 100-1156

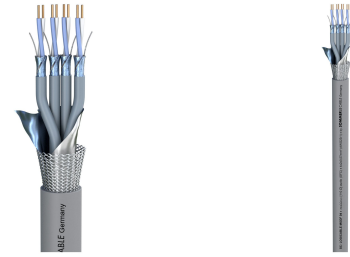

General Data

Article number :	100-1156
Name :	Logicable MP
Properties :	Analog
Properties :	Halogen-free / LSZH
Properties :	FRNC flame retardant
Properties :	OFC oxygen free copper
Properties :	Digital 110 Ω AES / EBU
Application area :	Installation
Application area :	ELA 100 V
Application :	Microphone and modulation cable
Colour :	grey
BPVo-Euroclass :	Fca

Technical Data

Signal transmission :	symmetrical
Construction :	[02(J-02YS0,57mm)(ST)]CH
Jacket material :	FRNC
Number of Channels (audio) :	32
Number of Channels (audio) :	24
Number of Channels (audio) :	20
Number of Channels (audio) :	12
Number of Channels (audio) :	10
Number of Channels (audio) :	8
Number of Channels (audio) :	6
Number of Channels (audio) :	4
Number of Channels (audio) :	2
Number of Channels (audio) :	1
Inner conductor (audio) :	2
Inner conductor Ø (audio) [mm] :	0,57
AWG (audio) :	23
Shielding :	Copper braiding tin-plated 85 % + AL foil
Shielding (audio) :	filler strand tin-plated AWG26 (0.4 mm) + AL foil
Shielding factor [%] :	100
Conductor insulation material :	Foam / Skin-PE
Conductor insulation Ø [mm] :	1,50
Style variant :	round
Packing :	bulk stock
Temperature min. [°C] :	-30
Temperature max. [°C] :	70
Width [mm] :	9
Height [mm] :	9

Electrical Data

Capac. cond./cond. per 1 m (audio) [pF] :	43
Capac. cond./shield. per 1 m (audio) [pF] :	83
Impedance [Ω] :	110
Insulation resist. per 1 km [GΩ] :	1
Insulation resist. per 1 km (audio) [GΩ] :	1
Conductor resistance per 1 km [Ω] :	82